

# GT2100/2125/2150

## ICU/CCU Manual Sliding Doors

Where VISIBILITY meets PEACE OF MIND



### Product Features and Benefits

- Self-closing option **allows door to slide closed slowly after opening**
- Available with track or trackless options to **meet today's design needs**
- Substantial unobstructed view to patients **provides nurses peace of mind**
- Large opening access for **trouble-free transport of beds and medical equipment**
- Air infiltration package includes positive latching to **reduce the spread of germs and maintain air quality**

# GT2100/2125/2150 Series Manual Sliders for ICU and CCU

The NABCO GT2100, GT2125 and GT2150 Manual Sliders are engineered to accommodate the specific needs of hospital intensive and cardiac care units (ICU/CCU). The 2100 series provides room access in a full-open breakout, trackless-style unit. The 2125 is also a trackless-style unit, but in a fixed sidelight configuration, where the door panel(s) only breakout. The 2150 is a full-open, breakout-style unit using a floor track. Each system is available in two, three, four and six panels, allowing users to stack the panels to one side to maximize full opening access for ease of patient transport and other large medical equipment. When in the closed position, the doors contribute an unobstructed view, awarding patients a comfortable atmosphere while still ensuring immediate access during an emergency. With the air infiltration package, the sliders are ideal for rooms where air quality must be maintained in case of fire, as well as "infection control" to reduce germs from spreading and preserving a sterile environment.



## PRODUCT INFORMATION

Header dimensions – standard	4 1/2" W (114.3 mm) x 4" H (101.6 mm)
Header dimensions – telescopic	6 3/8" W (161.93 mm) x 4" H (101.6 mm)
Standard finish	Clear and dark bronze anodized
Optional finishes	Painted, special anodized, clad

## CONFIGURATIONS

Trackless – standard	2-panel, 4-panel /full breakout, fixed sidelite
Trackless – telescopic	3-panel, 6-panel /full breakout, fixed sidelite
Track – standard	2-panel, 4-panel /full breakout
Track – telescopic	3-panel, 6-panel /full breakout

## STANDARD FEATURES

Horizontal muntins	Pullhandles (one side); Recessed pulls (one side)	Flush bolt (2100 FBO trackless only)
4" bottom rails	2 1/8" narrow stiles	Electrostatic discharge grounding (anti-static)
Vinyl seals (accommodates glazing to 1" thickness)		


## AVAILABLE OPTIONS

Air infiltration package	Permanent anti-microbial finish	4" medium stiles
5", 6 1/2", 10" bottom rails	Self-closing	Positive latch
Security hook and latch	Hold-open tied to fire alarm	Door control sensor
Accommodates between-the-glass horizontal blinds up to 1" thickness (by others)		
Accommodates etched/matte glass; electronic privacy glass (by others)		


## APPROVALS

Approvals	UL1784, NFPA105, NFPA101
-----------	--------------------------


GT2150 RH Single  
(Also available: Bi-part and Telescopic)

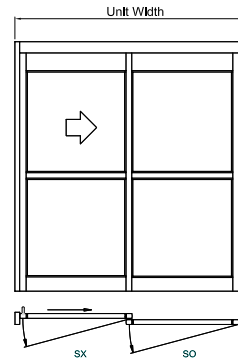

GT2100 RH Telescopic  
(Also available: Bi-part and Single)

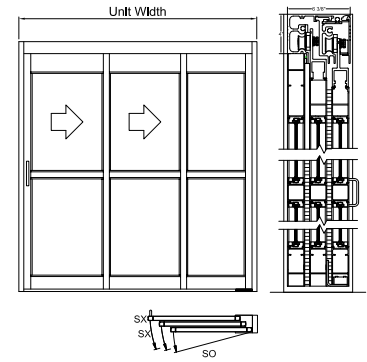

GT2125 Bi-Part  
(Also available: Single and Telescopic)

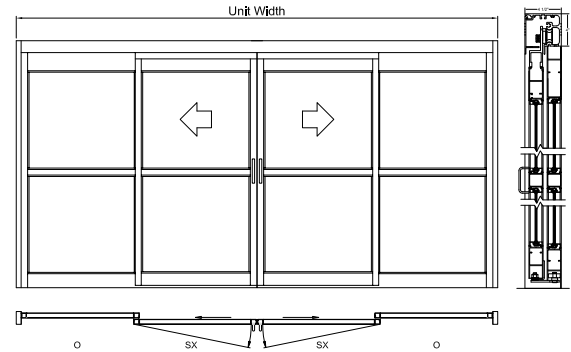

## SELECTION GUIDE

DOOR TYPE	FBO / FSL	FRAME WIDTH	DOOR OPENING	BREAKOUT OPENING
2100 Trackless 2-panel - standard	FBO	7' 2 7/8" (2207) – 9' 4 3/8" (2854)	36" (914) – 48" (1219)	78 13/16" (2002) – 104 5/16" (2650)
2100 Trackless 4-panel - standard	FBO	10' 2 1/4" (3105) – 18' 5 1/4" (5620)	48" (1219) – 96" (2438)	109" (2784) – 208" (5299)
2100 Trackless 3-panel - telescopic	FBO	5' 2" (1575) – 12' 6 3/8" (3820)	28' 11/16" (729) – 87' 11/16" (2227)	51 3/16" (1300) – 139 9/16" (3545)
2100 Trackless 6-panel - telescopic	FBO	8' (2438) – 24' 9" (7544)	41 3/8" (1051) – 175 3/8" (4455)	78 3/8" (1991) – 279 3/8" (7096)
2125 Trackless 2-panel - standard	FSL	6' 9 1/2" (2070) – 8' 9 1/2" (2680)	36" (914) – 48" (1219)	39" (991) – 51" (1295)
2125 Trackless 4-panel - standard	FSL	9' 3 1/2" (2832) – 17' 3 1/2" (5271)	48" (1219) – 96" (2438)	54" (1371) – 102" (2591)
2125 Trackless 3-panel - telescopic	FSL	5' 1 1/2" (1562) – 13' (3962)	32 1/8" (816) – 95 1/8" (2415)	35 1/8" (892) – 98 1/8" (2492)
2125 Trackless 6-panel - telescopic	FSL	8' (2438) – 26' (7925)	49" (1245) – 193" (4902)	55" (1397) – 199" (5055)
2150* Track 2-panel - standard	FBO	6' 9 1/2" (2070) – 8' 9 1/2" (2680)	36" (914) – 48" (1219)	73 1/2" (1867) – 97 1/2" (2477)
2150* Track 4-panel - standard	FBO	9' 3 1/2" (2832) – 17' 3 1/2" (5271)	48" (1219) – 96" (2438)	99" (2515) – 195" (4953)
2150* Track 3-panel - telescopic	FBO	5' 1 1/2" (1562) – 13' (3962)	32 1/8" (816) – 95 1/8" (2416)	48 1/2" (1232) – 143" (3632)
2150* Track 6-panel - telescopic	FBO	8' (2438) – 26' (7925)	49" (1245) – 193" (4902)	74" (1880) – 290" (7366)

\*Recessed track available.

## NABCO Service and Specifications

Along with the NABCO factory branches, NABCO has the largest independently owned network of automatic door distributors in North America. Their friendly, qualified installers and technicians always strive to exceed your expectations from install to after-sales service. NABCO's factory branches and independent distributors provide AAADM-certified technicians to ensure your doors meet all ANSI A156.10 standards.

Complete three-part specifications and CAD drawings are available on the NABCO website.



Member of the Nabtesco Group

NABCO ENTRANCES INC.

S82 W18717 Gemini Drive | Muskego, WI 53150 | 877-622-2694 | Fax 888-679-3319

www.nabcoentrances.com | Email info@nabcoentrances.com



Distributed by: