

# Trilock 60



**BOON EDAM**

**The Trilock 60 is an attractively finished tripod turnstile, suited for high volume, abusive applications, such as stadiums, arenas or other "busy" settings. Available in mechanical or electric models.**

**Options**

- Pedestrian counter
- Coin / token operation
- Extended arm length
- Red and green indicator lights
- Platform and railing and wheels
- Out-of-use lock

All Boon Edam secured entry solutions can easily be integrated with virtually any access control system.


 *your entry experts*



## Dimensions and Specifications

A	B	C	D	E	F	G			
Passage Width	Capacity / Minute*	Disabled Access	Type of Traffic	Overall Width	Arm Length	Arm Height	Overall Height	Unit Length	Unit Width
18"	20-25	x		25"	16"	33"	38"	27"	7"
20"	20-25	x		27"	18"	33"	38"	27"	7"
22"	20-25	x		29"	20"	33"	38"	27"	7"

\* Depending on access control system, in one direction

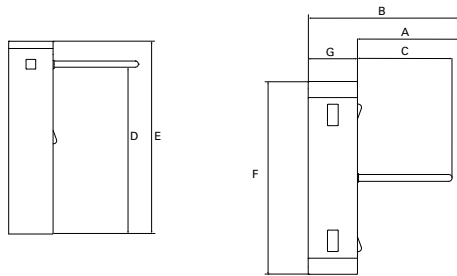

## Emergency Egress

The Trilock 60 is available with fail-safe or fail-secure operation. While the fail-secure model ensures that the entrance stays closed in case of emergency or power failure, the fail-safe model will free the passage by allowing free rotation of the arm set or automatically collapsing the horizontal arm down. Alternatively, if a fire alarm is connected, the fail-safe function can automatically be activated upon receipt of a fire alarm signal.

## Features and Options

Characteristics	Standard	Option
Fail-lock or fail-safe	•	
Free or locked exit	•	
2-way independent controls	•	
Transformer step-down (electric models)	•	
Complete stainless steel construction	•	
Pulse relay	•	
Time-out relay	•	
Coin / token operation		•
Rotation detection switch		•
Remote release button		•
Pedestrian counter		•
Serial port interface		•
Electronic key bypass		•
Mechanical key bypass		•
Red and green indicator lights		•
Powder coated color choices (RAL ref)		•
Platform, railing and wheels		•
Out-of-use lock		•
Canvas turnstile cover		•
Heavy-duty foam sleeves for arm cover		•
Extended arm length		•

## Technical Specifications

Power Supply:	110 or 220 VAC, 50/60 Hz
<b>Power Consumption</b>	
Operating:	220W
Ambient Temperature:	+5°F to +113°F
Weight:	110 lbs (65 kg)