

GT1175

All Glass
Automatic Sliding Doors

Where ELEGANCE meets DURABILITY



Product Features and Benefits

- Eliminates vertical framing for a **sleek, contemporary look**
- Heavy-duty anodized roller track for **long-lasting durability**
- Low-profile bottom rail allows for a **larger, unobstructed view**
- Large urethane door rollers for **smooth and long-lasting operation**
- Belt drive and brushless motor system ensures **silent and reliable operation**
- Superior double-mohair thermal brush provides **maximum isolation from outside elements**
- Equipped with sensor systems that comply with ANSI 156.10 and promote **reduced liability and increased safety**



GT1175 All Glass Automatic Sliding Doors

The NABCO GT1175 All Glass Sliding Door eliminates vertical framing resulting in a sleek, contemporary look. The low-profile bottom rail allows a larger, unobstructed view that is perfect for enhancing an attractive lobby or well-manicured grounds. While elegant by design, the GT1175 All Glass Sliding Door is engineered to withstand challenging environment and weather conditions while maintaining smooth operation and quiet, whisper-like performance. NABCO's microprocessor control provides reliable door operation, important usage counts, and diagnostic features for quick troubleshooting and reduced maintenance costs, making this a seamless automatic door entrance solution.

The GT1175 Slider Operator




Header cover is pre-wired for sensor installation and uses extra-thick aluminum extrusions to minimize deflection.




Quick-disconnect power supply Low-voltage transformer Microprocessor control Brushless motor/gearbox Thick weatherstrip Microfiber-reinforced belt

PRODUCT INFORMATION	
Header dimensions - standard	6 1/2"W (165.1) x 7 1/2"H (190.5)
Standard finish	Clear and dark bronze anodized
Optional finishes	Painted, clad, special anodized
Mounting	Concealed
Threshold	Surface-applied, recessed, none
Configurations	Single, bi-part / fixed sidelite
TECHNICAL INFORMATION	
Operator drive	Electro-mechanical
Drive system	Belt drive
Motor type	1/4 HP (peak) brushless
Primary circuit protection	Breaker
Controller	Microprocessor
Breakout	System disabled when panels break out
Operating voltage	120 VAC - 5 AMP
Auxiliary power output	12 VDC
Maximum door panel weight	600 lbs.
Switch modes	On/off, 1-way, 2-way, hold-open, night
Opening and closing speed	Adjustable
Reduced opening function	Standard
Obstacle detection	Available in both directions
Hold-open time	Adjustable [0-67 seconds]
CODE COMPLIANCE / APPROVALS	
Code compliance	ANSI A156.10
Approvals	UL, ULC and CSFM


Left hand single slide - fixed sidelite

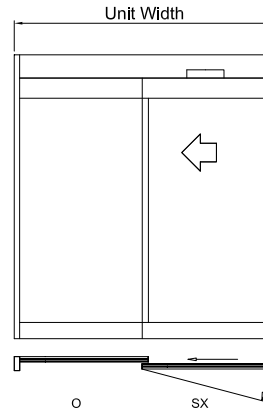

Right hand single slide - fixed sidelite

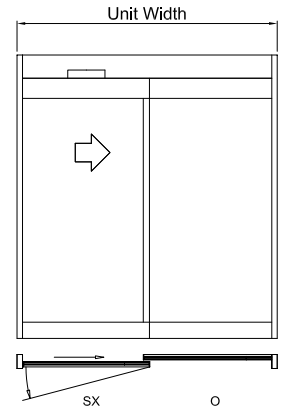

Bi-part slide - fixed sidelite

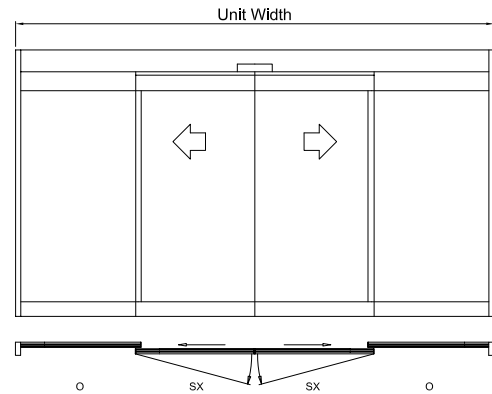

NABCO Service and Specifications

Along with the NABCO factory branches, NABCO has the largest independently owned network of automatic door distributors in North America. Their friendly, qualified installers and technicians always strive to exceed your expectations from install to after-sales service. NABCO's factory branches and independent distributors provide AAADM-certified technicians to ensure your doors meet all ANSI A156.10 standards.

Complete three-part specifications and CAD drawings are available on the NABCO website.

SELECTION GUIDE

DOOR TYPE	FRAME WIDTH	DOOR OPENING	BREAKOUT OPENING
Single FSL	7' (1930) - 9' (2743)	37 3/8" (949) - 49 3/8" (1254)	39" (990) - 51" (1295)
Bi-part FSL	10' (3048) - 14' (4267)	52 1/2" (1334) - 76 1/2" (1943)	55 3/4" (1416) - 79 3/4" (2026)



Member of the Nabtesco Group

NABCO ENTRANCES INC.

S82 W18717 Gemini Drive | Muskego, WI 53150 | 877-622-2694 | Fax 888-679-3319

www.nabcoentrances.com | Email info@nabcoentrances.com



Distributed by: