

Twinglock 900



BOON EDAM

The Twinglock 900 combines two stainless steel columns and two glass panels to create a stylish and efficient secured entry solution. Sensors in the columns ensure that both barriers operate simultaneously and open and close quickly.

Options

- Card reader mounting options
- External control panel
- Extended glass


 *your entry experts*



Dimensions and Specifications

A	B	C	D	E				
Passage Width	Capacity / Minute*	# of Barriers	Disabled Access	Type of Traffic	Overall Width	Barrier Width	Barrier Height	Overall Height
36"	10-15	2			49-1/2"	16"	39-1/2"	43"

*Depending on access control system, in one direction

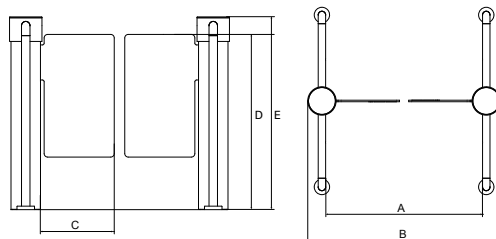

Features and Options

Characteristics	Standard	Option
2-way traffic	•	
Automatic operation	•	
Single or multiple lane setup	•	
Multiple working modes	•	
Disabled access	•	
Sensor system	•	
Adjustable door wing speed	•	
Multiple authorizations memory	•	
Audible alarm	•	
Fail-safe	•	
Card reader mounting options		•
External control panel		•
Extended glass		•

Access Control Integration

All Boon Edam secured entry solutions can easily be integrated with virtually any access control system. Card readers, fingerprint readers or other authorization systems can be integrated in the column of the Twinglock 900 or mounted in a secondary pedestal near the gate allowing for a more fluid entry process.

Emergency Egress

The Twinglock 900 is fail-safe: in case of emergency the lock and motor disengages allowing free passage. If back-up power is available the Twinglock 900 can be configured to automatically open in the exit direction. (Escape route requirements are subject to local regulations.)

BoonTouch

Boon Edam offers a universal control panel that can operate up to six different security access solutions from a reception or security desk. Its user friendly, touchscreen interface allows for each solution to be operated separately or simultaneously and displays individual lane alarms with intuitive icons.

Technical Specifications

Power Supply: 240 VAC, 50/60 Hz

Power Consumption

Operating: 75W

Stationary: 35W

Ambient Temperature: -4°F to +122°F

Weight: 220 lbs (100 kg)