

# Turnlock 250 CSTG



**A clear and open appearance ensures that the full height turnstile Turnlock 250 CSTG is particularly suitable for indoor applications. This model consists of three door wings constructed of wide polycarbonate panels. Indicator lights are integrated as standard.**

#### **Options**


- Remote release button
- Rotation detection switch
- Card reader box
- Key bypass

All Boon Edam secured entry solutions can easily be integrated with virtually any access control system.






## Dimensions and Specifications

Type	Capacity / Minute*	Disabled Access	Emergency Exit	A Throat Opening	B Installation Width	D Height Under Top Channel	E Top Channel Height	Depth
Turnlock 250 CSTG	15-20	x	x	25-3/8"	60"	81"	8"	60"
THG 51 Access Gate	-		✓	36"	42"	81"	8"	6 1/2"

\*Depending on access control system, in one direction

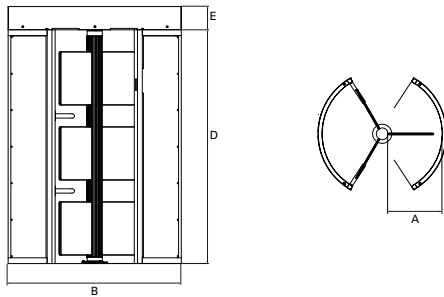

## Features and Options

Characteristics	Standard	Option
Fail-lock or fail-safe (electric models)	•	
Free or locked exit (all models)	•	
Pulse relay	•	
Hydraulic speed control	•	
Red and green indicator lights	•	
Field configurable top channel	•	
Mechanical key bypass	•	
Remote release button		•
Home position switch		•
Rotation detection switch		•
Card reader box		•
Electrical key bypass		•

## Emergency Egress

The electric Turnlock 250 CSTG can be configured to have a fail-safe exit, which, in the case of a power failure, unlocks the mechanism to allow free exit. If integrated with a fire alarm system, the locking mechanism is disengaged automatically in an alarm situation. A THG 51 side gate can also be installed next to the turnstile for additional exit capacity. (Escape route requirements are subject to local regulations.)

## BoonTouch

Boon Edam offers a universal control panel that can operate up to six different security access solutions from a reception or security desk. Its user friendly, touchscreen interface allows for each solution to be operated separately or simultaneously and displays individual lane alarms with intuitive icons.

## Technical Specifications

Power Supply: 110-240 VAC, 50/60 Hz

### Power Consumption

Operating: 60W

Ambient Temperature: -4°F to +131°F

IP Value: IP 56

Weight: 800 lbs (360 kg)

tandem version: 220 lbs (430kg)