

# Transpalock 900



**BOON EDAM**

**The Transpalock 900 is the most elegant waist high turnstile available today. Three glass door wings around a stainless steel column provide a beautiful entry. Its transparency ensures that the Transpalock complements virtually any interior design.**

#### **Options**

- Single lane or multiple lane set-up
- Push & Go operation
- External control panel
- Card reader mounting options
- Custom handrails


 *your entry experts*



## Dimensions and Specifications

A	B	C	D	E				
Passage Width	Capacity / Minute*	# of Door Barriers	Disabled Access	Type of Traffic	Overall Width	Throat Opening	Barrier Height	Overall Height
24-1/2"	15-20	3	x		63"	28"	39-1/2"	43"

\*Depending on access control system, in one direction

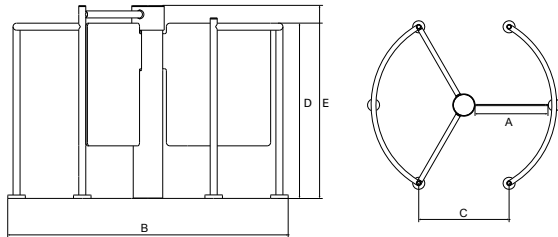

## Emergency Egress

The Transpalock is fail-safe, ensuring the lock and motor will disengage in the event of a power failure to allow free passage.

## BoonTouch

Boon Edam offers a universal control panel that can operate up to six different security access solutions from a reception or security desk. Its user friendly, touchscreen interface allows for each solution to be operated separately or simultaneously and displays individual lane alarms with intuitive icons.

## Access Control Integration

All Boon Edam secured entry solutions can easily be integrated with virtually any access control system. Card readers, fingerprint readers or other authorization systems can be integrated in the column of the Transpalock 900 itself or on an optional secondary pedestal or column that can be placed in the vicinity of the gate itself. This allows for a more fluid entry process.

## Features and Options

Characteristics	Standard	Option
2-way traffic	•	
Automatic operation	•	
Control unit	•	
Anti-tailgating	•	
Multiple lane setup	•	
Audible alarm	•	
Fail-safe	•	
Push-and-go operation		•
Visible clamps		•
Custom handrails		•
Card reader mounting options		•
External control panel		•

## Technical Specifications

Power Supply: 240 VAC, 50/60 Hz

### Power Consumption

Operating: 65W

Stationary: 20W

Ambient Temperature: -4°F to +122°F

Weight: 260 lbs (118 kg)